

INNOVATIONS

TESTOMAT® 808 SiO₂

- Measuring chamber flushed with pressure
- Low water consumption
- Cutting-edge electronics
- State-of-the-art indicator pump system
- Direct error and indicator quantity display
- Quality management with 2 relay outputs
- Limit value evaluation / External control
- Alarm processing
- Internal flushing via manual control
- 72 hours of unsupervised operation possible
- Selection between two indicator bottle sizes
- Two selector switches for interval measurement and limit value evaluation

AVAILABLE INDICATORS

Reagents	Art. no. 100 ml bottle	Art. no. 500 ml bottle
Testomat® 808 SiO ₂ reagent set, reagents A + B	140808	-
Testomat® 808 SiO ₂ reagent A	-	141808
Testomat® 808 SiO ₂ reagent B	-	141809

USA - Sales and Service
Heyl Brothers North America L.P.
150 North Michigan Avenue, 35th Floor
Chicago, Illinois 60601
www.heylbros.com
Phone: +1 (312) 377 6123
Email: USA@heyhl.de

Germany- Production and Development
Gebrüder Heyl Analysetechnik GmbH & Co. KG
www.heyhl.de
Phone: +49 (0) 51 21 2 89 33 0
Fax: +49 (0) 51 21 2 89 33 67
Email: info@heyhl.de

Flyer Testomat 808SiO₂ US200915

TESTOMAT® 808 SiO₂

ONLINE ANALYSIS INSTRUMENT
FOR SILICA UP TO 1.2 PPM



 **HEYL BROTHERS**
North America L.P.
Water is our Element

PERFORMANCE SPECIFICATIONS

FOR THE TESTOMAT® 808 SiO₂

The Testomat® 808 SiO₂ equipment has been designed for use in the sterilisation of hospitals. The device is a limit gauge that automatically monitors the level of SiO₂ in the water. It complies with the EN 285:2006 standard for steam sterilizers.


The device is also suited in other industries for product monitoring due to its adjustable measuring range.

Overview of functions:

- Selection of 10 limit values from 0.3 to 1.2 ppm
- Automatic interval mode interval pause can be set from 0 – 480 minutes
- External control (quit alarms, stop analysis)
- Manual start
- Extended operating periods due to 500 ml indicator storage bottle
- RS232 interface for optional firmware update and data output to the computer
- Weekend operation monitoring through 72-hour operation without supervision (BOB)
- Status and error messages output via a current loop

PLANT EXAMPLE

SILICATE MONITORING IN HOSPITALS

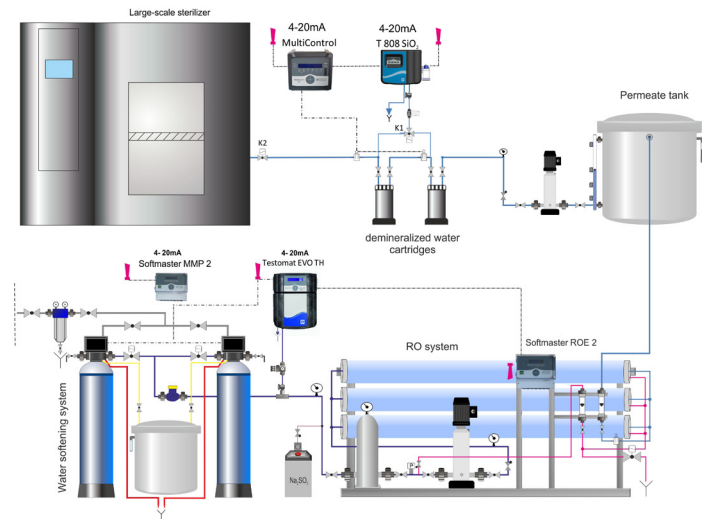

Surgical instruments can be destroyed by silicates > 1ppm in the sterilization steam. The silicate monitoring with the Testomat® 808 SiO₂ helps to eliminate this risk and in the long term to avoid the high costs of replacement of surgical instruments.



© Designed by Nensuria / Freepik

TECHNICAL DATA

FROM THE TESTOMAT® 808 SiO₂

Power supply: 24 / 115 / 230V, 50 – 60 Hz
Instrument protection 230 – 240 V: T0.1 A
Instrument protection: 115 V: T0.2 A
Instrument protection: 24 V: T0.8 A

Power consumption: max. 16 VA, without external load

Protection class: I

Degree of protection: IP 44

Compliance: EN 61000-6-2,
EN 61000-6-4, EN 61010-1



Ambient temperature: 55.8 – 77 °F / 15 – 25 °C

Measuring range: Silica 0.3 – 1.2 ppm

Current interface: Output of defined values (5, 8, 11, 14, 17, 20 mA) for displaying status and error messages, max. load 500 Ohms

Contact load relay: 230V / 4AAC ohm resistive load

Dimensions: W x H x D = 14.3 x 12.4 x 5.4 inch
with side pocket: 17.4 x 12.4 x 5.4 inch

Weight: 9.59 lb./ 4350 g

Mains water supply

Operating pressure: Depending on product configuration: 4.4 to 58 psi (a pressure reducer (not included) should be used for over 58 psi)

Water temperature: 50 to 104 °F / 10 – 40°C (a cooler should be installed for temperatures above 104 °F / 40°C)

Water inlet: 1/4-in inlet fitting

Water outlet: Opaque hose with an internal diameter of 0.55 inch